


VISION

The new 42" Vision PM-4230

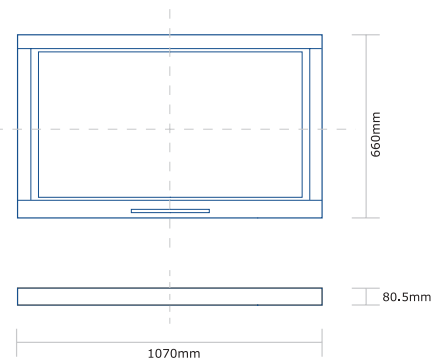

- Versatile and stylish
- High resolution
- Best value plasma screen available
- Display video and data on same screen
- 5 x video inputs.
- 16 x 9 Wide-screen plasma display, 8.5cm thin
- weights in only at 29.5kg.
- 1 year swap out warranty

| | |
|---------------------------------|---|
| Driving Type | AC type |
| Power Supply | AC 100~240V (50/60Hz) |
| Aspect Ratio | 16:9 |
| Brightness | 1300 cdm2 |
| Contrast Ratio | 3,000:1 |
| Pixel Pitch | 1.08mm x 1.08mm |
| Number of Pixels | 853 x 480 |
| System Control Terminals | RS232C |
| Video Input Signal | 1CH Video, 1CH S-Video, 1CH DVI-D, 1CH Component for DTV/DVD, 1CH 15 pin D-sub, |
| Audio Input Signal | 1CH Audio R/L |
| Sound Output | 2 x 10W |
| Video Standards | NTSC, PAL, SECAM, NTSC4.43, PAL-M |
| Power Consumption | 320W |
| Expected Life | 30,000 Hours (to 50% brightness) |
| Weight | 29.5kg (monitor only) |
| Dimensions | 1070mm(W) x 660mm(H) x 80.5mm(D) |
| Effective Display Area | 921mm(H) x 518mm(V) |
| Plasma Screen Size | 42" |
| Video Out | 1CH RCA jack |
| Audio | R/L 2 CH RCA jack |
| Additional Features | Vertical graphic display, Image burning |
| Speakers | Optional |


For further information please contact:



VISION

VISION

The new 42" Vision PM-4230



The most competitively priced Plasma Screen in Europe!



VISION

The new 42" Vision PM-4230



The most competitively priced Plasma Screen in Europe!

Motion Adaptive Progressive Scanning

New I.P(Interlace to Progressive) conversion uses an automatic adaptive temporal/spatial algorithm to maximize the display resolution in stable picture areas, elimination artifacts that occur around moving objects.

DVI Connection

The PM-4230 is equipped with a DVI(Digital Visual Interface) terminal for direct digital input of RGB signals. DVI minimizes the distortion of data transfer and sync problem.

Powerful 2x10W Hi-Fi Audio Amplifier

3 way 2 speaker system.

Outstanding Contrast Ratio

World's leading 3,000:1 contrast ratio provides clearer image.

User Friendly Control System

Full graphic OSD with easy-to-operate remote control.

Anti-Phosphor Burning Function

Orbiter moves horizontally and vertically to prevent burning of phosphor.

Quiet Operation with Durability

For commercial use, durability is critical. 2 fans sink heat efficiently with less noise.

PIP

The PM-4230 provides various picture in picture functions. Graphic on video and video on graphic are available and customers can put the picture anywhere on the screen.


Dimensions and Accessories



Wall Mount Bracket
MT VIS PLAS WALL MT
• Installation: Horizontal
• Mounting angle: 0°, 10°, 15°, 20°



Speakers
AC SP-PM4202SIL
(Silver, Black, Champagne Gold)
• D: 90(W) x 652(H) x 83(D)mm
: speaker only



Specifications are subject to change without notice